
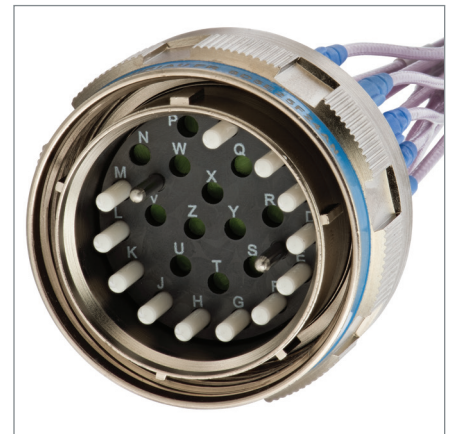
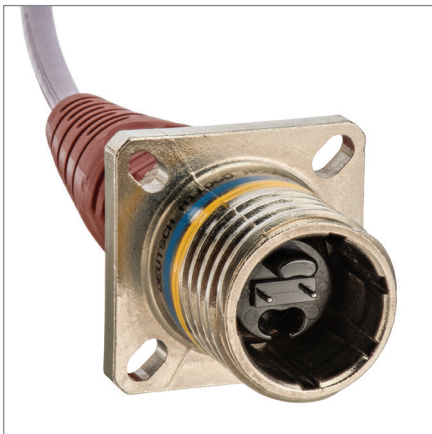


Fiber Optic Assemblies

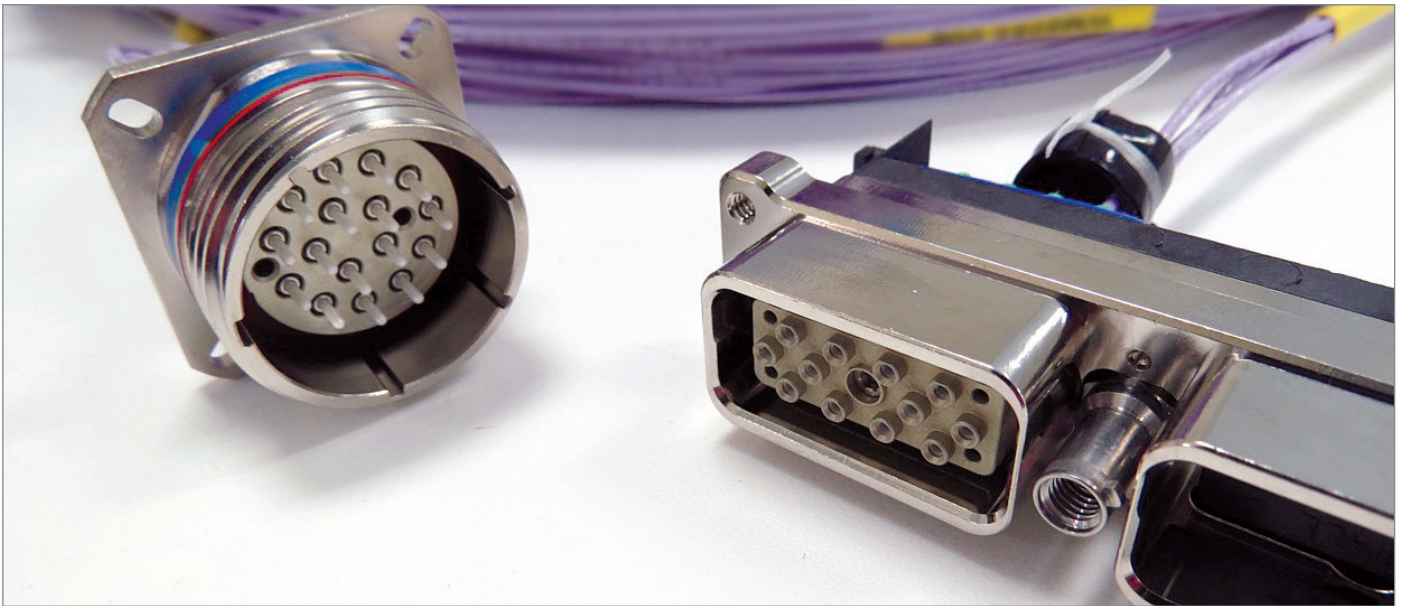

INTRODUCTION

Carlisle Interconnect Technologies (CarlisleIT) offers a full range of fiber optic cable assemblies including fiber jumpers, connectorized assemblies, highly complex breakout assemblies, long length assemblies and fiber harnessing on racks, trays or other structures and terminates all common connector and termini designs.

Designed to perform in the harshest installation and operating environments such as aerospace, defense and industrial applications, CarlisleIT's fiber optic assemblies offer unmatched performance in temperature extremes with immunity to electromagnetic inference (EMI).

ASSEMBLY TESTING PROTOCOLS

- » High definition video visual inspection of fiber connector interfaces at high magnification, with digital capture, complete test reporting and archiving of termination endface quality
- » Multiple channel IL/RL testing at 660/850/1310/1550 nanometer wavelengths with full test results reporting
- » Advanced interferometer testing for precise endface geometry control

Fiber Optic Assemblies

How to Order:



- » 1) Choose your cable codes from the Cable Information table.
- » 2) Choose your connector codes from the Connector Codes table (consult factory if your connector is not shown).
- » 3) Build your assembly part number from the Part Number Guide.

Fiber Count	Fiber Type				Fiber Characteristic		Coating Type		Jacket Type	
001	A	OM1 (62.5/125)	H	105/125 (MM)	1	N/A	A	Standard (-40°C to +65°C)	1	Coated Fiber
002	B	OM2 (50/125)	I	110/125 (MM)	2	Bend Insensitive	B	Mid Temp (-65°C to +125°C)	2	900um Acrylate Buffered
003	C	OM3 (50/125)	J	200/240 (MM)	3	Polarization Maintaining	C	High Temp (-65°C to +150°C)	3	900um Fluoropolymer Buffered
...	D	OM4 (50/125)	K	PM (SM)	4	Radiation Hardened	D	Extreme Temp (-65°C to +260°C)	4	Fluoropolymer Jacketed
999	E	OS1 (SM)	L	POF (MM)	5	Custom/Other	E	Custom/Other	5	Custom/Other
	F	OS2 (SM)	M	Custom/Other						
	G	100/140 (MM)								

Contact A				Contact A Polish		Contact B				Contact B Polish		Engineering Assigned	Length	Unit of Measure
A	ARINC 801	K	FC	1	Flat	A	ARINC 801	K	FC	1	Flat	XXX	001	IN
B	Elio®	L	MTP (M)	2	PC	B	Elio®	L	MTP (M)	2	PC		002	FT
C	M29504/4	M	MTP (F)	3	SPC	C	M29504/4	M	MTP (F)	3	SPC		003	MT
D	M29504/5	N	MT-RJ (M)	4	UPC	D	M29504/5	N	MT-RJ (M)	4	UPC		...	MM
E	M29504/14	O	MT-RJ (F)	5	APC(8°)	E	M29504/14	O	MT-RJ (F)	5	APC (8°)		999	CM
F	M29504/15	P	LX-5	6	Optical Lens	F	M29504/15	P	LX-5	6	Optical Lens			KM
G	Pro-Beam®	Q	MU	7	Custom/Other	G	Pro-Beam®	Q	MU	7	Custom/Other			
H	LC	R	SMA 905			H	LC	R	SMA 905					
I	SC	S	D4			I	SC	S	D4					
J	ST	T	Custom/Other			J	ST	T	Custom/Other					

Elio® is a Registered Trademark of Souriau.
PRO Beam® is a Registered Trademark of TE Connectivity.

PART NUMBER GUIDE

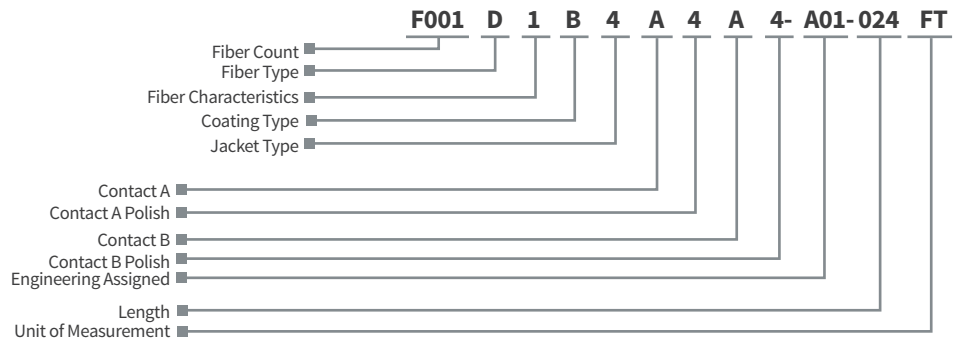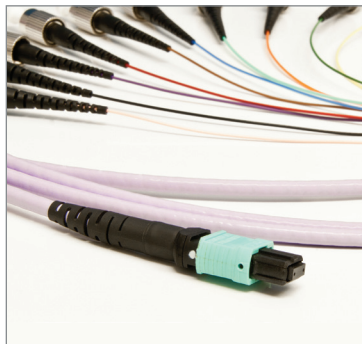

CONNECT WITH US TODAY

See CarlisleIT's line of **Cable Assemblies & Harnesses** at:
CarlisleIT.com/products/cable-assemblies-and-harnesses

(+1) 800-227-5953
Sales@CarlisleIT.com