




Providing complete avionics installation provisions and support for the Aviation industry since 1984.

50 Ohm Coaxial Cable

P/N 311901

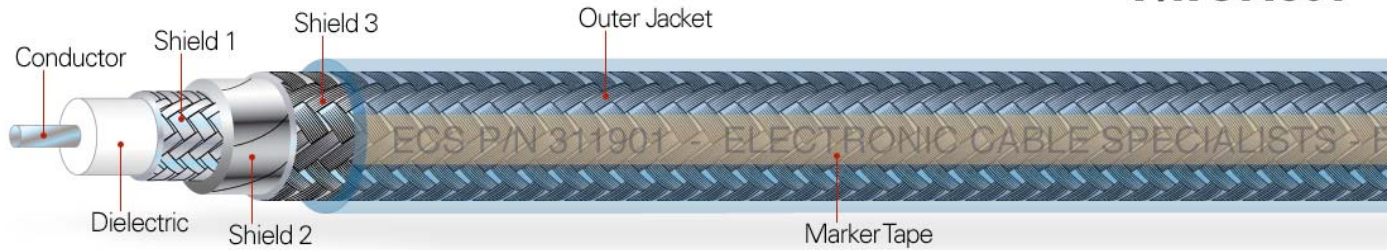

Conductor: 19 AWG solid silver plated copper
Dielectric: High temperature fluoropolymer
Shield 1: Silver plated copper braid
Shield 2: Aluminum foil
Shield 3: 36 AWG silver plated copper braid
Jacket: Blue high temperature fluoropolymer

Physical Characteristics

Outer Diameter: 0.195 in. nominal
Bend Radius: 1.0 in. nominal
Weight: 4.3 lbs/100 ft nominal
Temperature Range: -55° to +200° C
Skydrol Resistant: Yes

Electrical Characteristics

Impedance: 50.0 Ohms nominal
Capacitance: 29.3 pF/ft nominal
DC Resistance: 19.5 Ohms/1000 ft nominal
Time Delay: 1.46 ns/ft nominal
Attenuation: 1000 MHz 11.50 dB/100 ft nominal

Environmental:

- ECS avionics cables are designed to meet, or exceed, burn requirements as set forth in Federal Aviation Regulations 14 CFR Part 25.869(a)(4) Amdt 25-113, Appendix F Part I(a)(3).
- They are manufactured with materials which, when subjected to flames or high temperatures, will not outgas deadly hydrogen chloride produced by conventional PVC cables.

Connector Types for Cable 311901

Connector Type	Connector P/N	Connector Type	Connector P/N	Connector Type	Connector P/N
TNC 90°	CTR722	BNC 90°	CBR722	ARINC 404 Size 1	LM722
TNC 90° Extended	N/A	BNC 90° Extended	N/A	ARINC 600 Size 1	L7122
TNC 90° Long	N/A	BNC 90° Long	N/A	ARINC 600 Size 1RF	M7122
TNC Straight	CTS722	BNC Straight	CBS722	ARINC 600 Size 5	620021
TNC Panel Mount	N/A	BNC Bulkhead	BBS722	SMA 90°	CSR722
TNC Bulkhead	BTS722	N 90°	CNR722	SMA Straight	CSS722
C 90°	CCR722	N Straight	CNS722	HN 90°	CHR722
C Straight	CCS722	N Bulkhead	BN3722		

Cage Code: 66197 • **Issue Date:** 9/21/09

5300 W. Franklin Drive
 Franklin, Wisconsin 53132 USA

414.421.5300 • 800.327.9473
 sales@ecsdirect.com • www.ecsdirect.com

