




Providing complete avionics installation provisions
and support for the Aviation industry since 1984.

Tailwind 500 Cable

P/N 342215

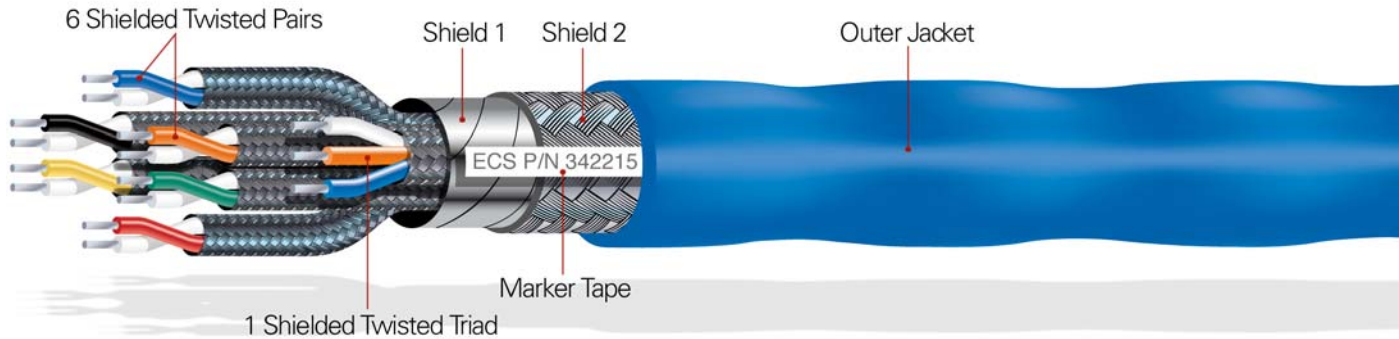

15 Conductors

6 Shielded Twisted Pairs:

Conductors: 22 AWG stranded tin plated copper

Insulation: High temperature fluoropolymer

Shield: 38 AWG tin plated copper braid

1 Shielded Twisted Triad:

Conductors: 22 AWG stranded tin plated copper

Insulation: High temperature fluoropolymer

Shield: 38 AWG tin plated copper braid

Overall Cable:

Shield 1: Aluminum/Polyester tape

Shield 2: 36 AWG tin plated copper braid

Outer Jacket: Blue high temperature fluoropolymer
(laser markable)

Physical Characteristics

Outer Diameter: 0.35 inches nominal

Weight: 11.0 lbs/100 ft

Temperature Range: -55° to +150° C

Skydrol Resistant: Yes

Applications

Tailwind 500

Color Code:

Pair 1: Blue, White

Pair 2: Orange, White

Pair 3: Green, White

Pair 4: Red, White

Pair 5: Black, White

Pair 6: Yellow, White

Triad: White, Blue Orange

Environmental:

- ECS Composite cables are designed to meet, or exceed, burn requirements as set forth in Federal Aviation Regulations 14 CFR Part 25.869(a)(4) Amdt 25-113, Appendix F Part I(a)(3).
- They are manufactured with materials which, when subjected to flames or high temperatures, will not outgas deadly hydrogen chloride produced by conventional PVC cables.

Cage Code: 66197 • **Issue Date:** 9/21/09

5300 W. Franklin Drive
Franklin, Wisconsin 53132 USA

414.421.5300 • 800.327.9473
sales@ecsdirect.com • www.ecsdirect.com

