




Providing complete avionics installation provisions
and support for the Aviation industry since 1984.

In-Flight Phone Cable

P/N 362804

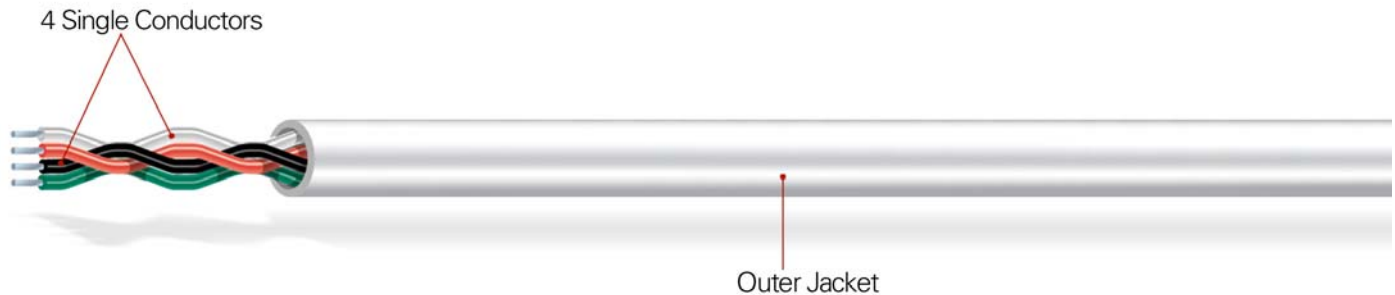

4 Single Twisted Conductors

Conductors: 28 AWG stranded tin plated copper
Insulation: High temperature fluoropolymer

Overall Cable:

Outer Jacket: White high temperature fluoropolymer
(laser markable)

Physical Characteristics

Outer Diameter: 0.07 inches nominal

Bend Radius: 0.53 inches

Weight: 0.48 lbs/100 ft

Temperature Range: -65° to +150° C

Skydrol Resistant: Yes

Applications

Retractable In-Flight Phone

Color Code:

White, Black, Red, Green

Environmental:

- ECS Composite cables are designed to meet, or exceed, burn requirements as set forth in Federal Aviation Regulations 14 CFR Part 25.869(a)(4) Amdt 25-113, Appendix F Part I(a)(3).
- They are manufactured with materials which, when subjected to flames or high temperatures, will not outgas deadly hydrogen chloride produced by conventional PVC cables.

Cage Code: 66197 • **Issue Date:** 9/21/09

5300 W. Franklin Drive
Franklin, Wisconsin 53132 USA

414.421.5300 • 800.327.9473
sales@ecsdirect.com • www.ecsdirect.com

