




Providing complete avionics installation provisions  
and support for the Aviation industry since 1984.

# ARINC 429 Data Bus Cable

**P/N 422202**

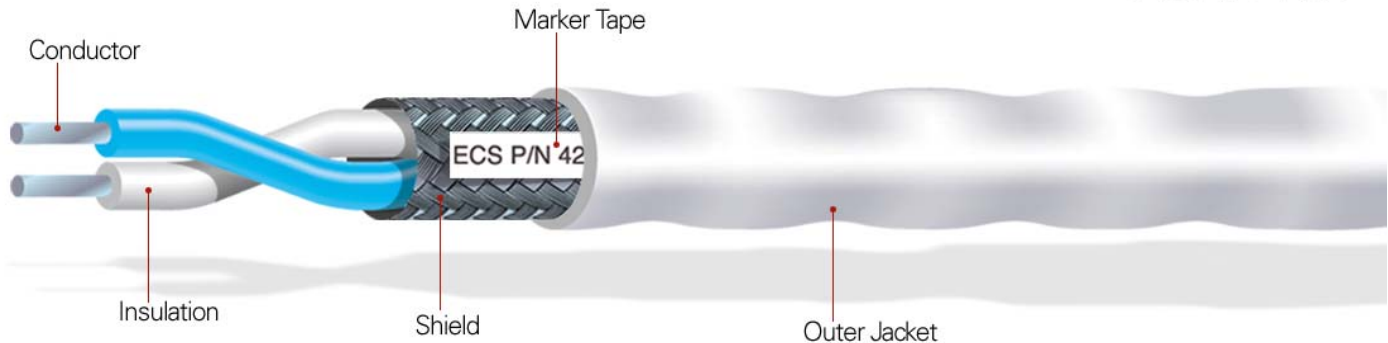

**2 Conductors:** 22 AWG stranded tin plated copper  
**Insulation:** High temperature fluoropolymer  
**Color Code:** White, Light Blue  
**Shield:** 36 AWG tin plated copper braid  
**Jacket:** White high temperature fluoropolymer  
(laser markable)

### Physical Characteristics

**Outer Diameter:** 0.17 inches nominal  
**Bend Radius:** 0.85 inches nominal  
**Weight:** 1.35 lbs/100 feet nominal  
**Temperature Range:** -55° to +200° C  
**Skydrol Resistant:** Yes

### Electrical Characteristics

**Impedance:** 70 Ohms nominal  
**Capacitance:** 25.0 pF/ft nominal  
**Attenuation:** 1 MHz 0.9 dB/100 ft  
(nominal) 10 MHz 4.0 dB/100 ft

### Applications

ARINC 429

### Environmental:

- ECS data bus cables are designed to meet, or exceed, burn requirements as set forth in Federal Aviation Regulations 14 CFR Part 25.869(a)(4) Amdt 25-113, Appendix F Part I(a)(3).
- They are manufactured with materials which, when subjected to flames or high temperatures, will not outgas deadly hydrogen chloride produced by conventional PVC cables.

**Cage Code:** 66197 • **Issue Date:** 9/21/09

5300 W. Franklin Drive  
Franklin, Wisconsin 53132 USA

414.421.5300 • 800.327.9473  
sales@ecsdirect.com • www.ecsdirect.com

