




Providing complete avionics installation provisions
and support for the Aviation industry since 1984.

Ethernet Cable

P/N 422408

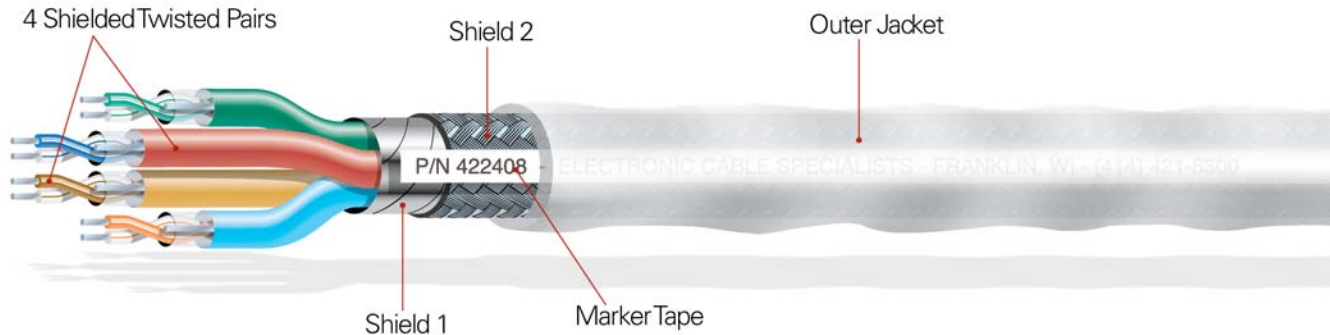

8 Conductors, 100 Ohms

4 Shielded Twisted Pairs:

Conductors: 24 AWG stranded tin plated copper
Insulation: High temperature fluoropolymer foam
Binder: Clear Mylar tape
Drain Wire: 24 AWG stranded tin plated copper
Shield: Aluminum/Mylar foil

Overall Cable:

Shield 1: Aluminum/Mylar foil
Shield 2: 36 AWG stranded tin plated copper
Outer Jacket: White high temperature fluoropolymer
(laser markable)

Physical Characteristics

Outer Diameter: 0.299 inches nominal
Bend Radius: 1.5 inches
Weight: 6.0 lbs/100 ft
Temperature Range: -55° to +200° C
Skew: < 12.8 ns/100 ft BUS
Skydrol Resistant: Yes

Applications

LVDS RIB Cable, ARINC 646, Ethernet

Color Code:

Pair 1: White/Blue, Blue/White
Pair 2: White/Orange, Orange/White
Pair 3: White/Green, Green/White
Pair 4: White/Brown, Brown/White

Pair 1, Shield: Red
Pair 2, Shield: Blue
Pair 3, Shield: Green
Pair 4, Shield: Gold

Environmental:

- ECS Composite cables are designed to meet, or exceed, burn requirements as set forth in Federal Aviation Regulations 14 CFR Part 25.869(a)(4) Amdt 25-113, Appendix F Part I(a)(3).
- They are manufactured with materials which, when subjected to flames or high temperatures, will not outgas deadly hydrogen chloride produced by conventional PVC cables.

Cage Code: 66197 • **Issue Date:** 9/21/09

5300 W. Franklin Drive
Franklin, Wisconsin 53132 USA

414.421.5300 • 800.327.9473
sales@ecsdirect.com • www.ecsdirect.com

