REQUIREMENTS:
UNLESS OTHERWISE SPECIFIED

1. Nickel plating must not show on outside diameter.
2. Tin plating may enter blind hole up to 1/2 inch.
3. Dimensions are before termination.

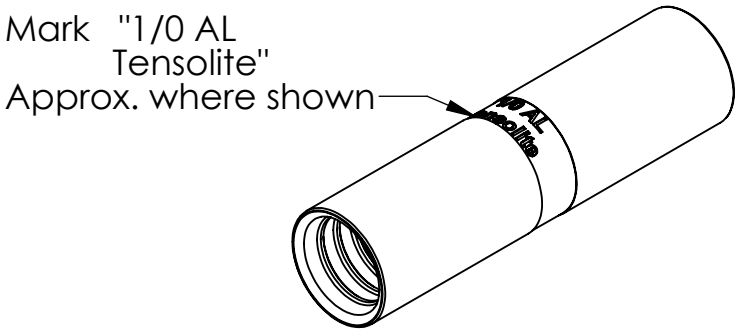

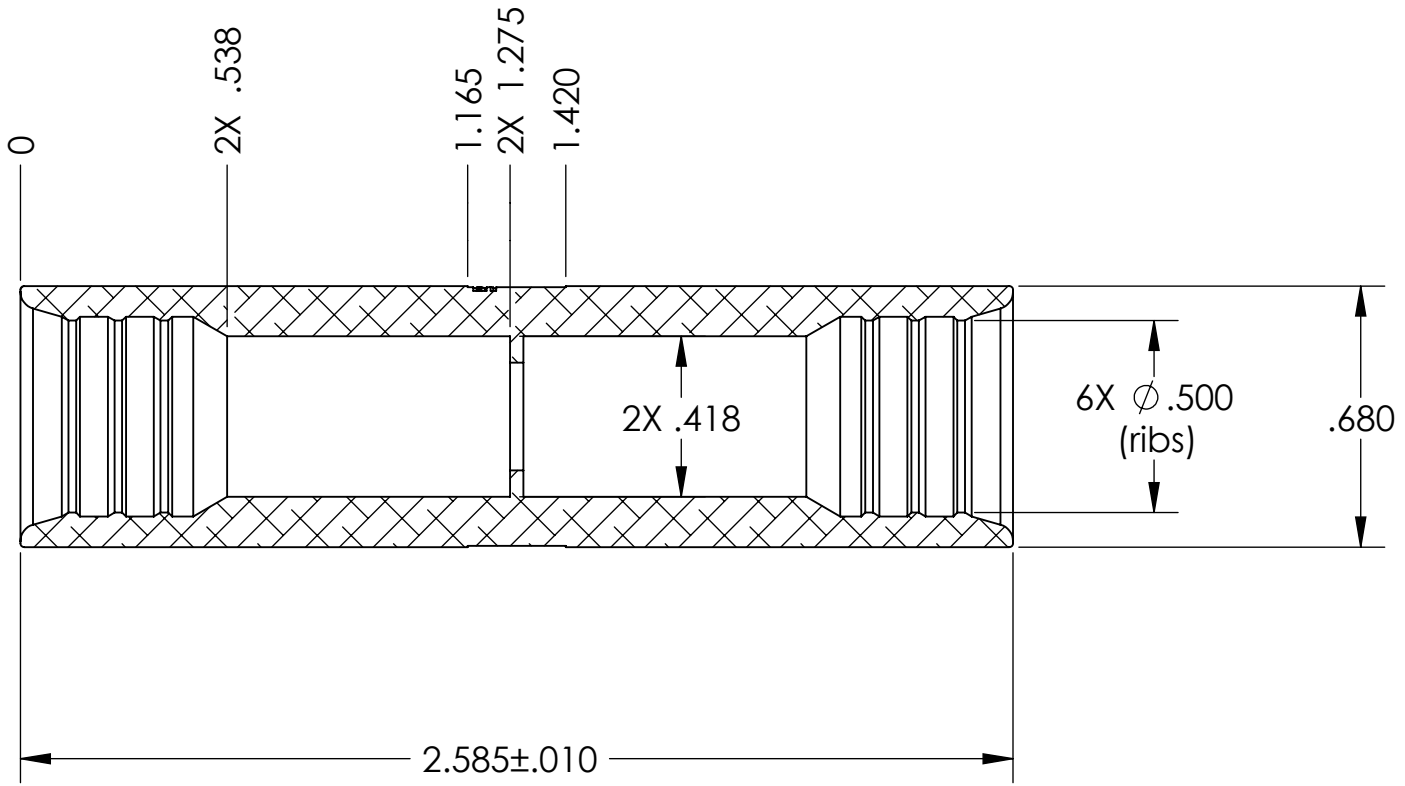

	Electrical Grade Aluminum per ASTM B221		Finish per Carlisle Spec FIN-301 (Exterior surfaces Matte Tin Interior Surfaces Nickel) See Notes: 1 and 2 above.					DIMENSIONS IN INCHES THIRD ANGLE PROJECTION TOLERANCES UNLESS OTHERWISE SPECIFIED ANGLES ±2° .XX DECIMALS ±.01 .XXX DECIMALS ±.005 .XXXX DECIMALS ±.0005			DESIGN, CONFIGURATION AND MECHANICAL FEATURES REVEALED ON THIS DRAWING ARE THE SOLE PROPERTY CARLISLE COMPANY AND ARE NOT TO BE DISCLOSED TO OTHER PARTIES WITHOUT EXPRESS CONSENT AND APPROVAL OF CARLISLE.
				P2	Length +.010	04/19/2012	BA				
				P1	ORIGINATED	5/19/10	BA				
MAT'L CODE	MATERIAL DESCRIPTION	FIN CODE	FINISH DESCRIPTION	REV	E.C.O. NO.	DATE	APPR	DRAW	WLA	05/19/10	CARLISLE Interconnect Technologies 100 Tensolite Drive St Augustine, FL 32092
								ENG.	WLA	05/19/10	DESCRIPTION Splice Connector 1/0 PG. 1 OF 1 FSCM. 92607 NO. 640-43072-01