


Multiport Quick-Connect Harness With Push-On Type RF Interface

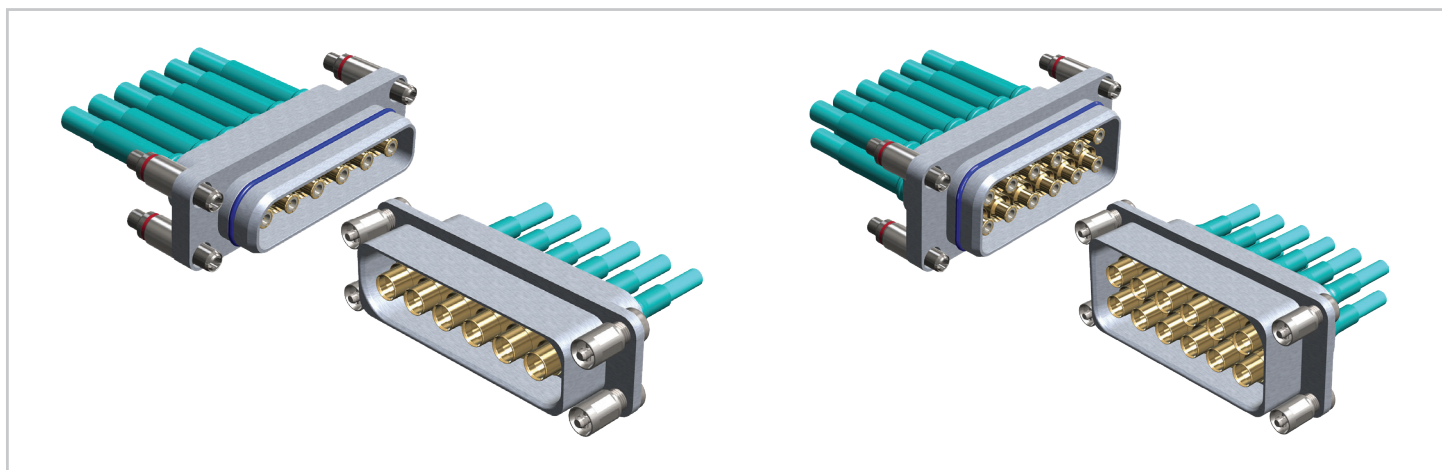

Left: 6-Way Multiport Quick-Connect Push-On (SMP) Plug & Receptacle

Right: 12-Way Multiport Quick-Connect Push-On (SMP) Plug & Receptacle

INTRODUCTION

Our Multiport Quick-Connect Harness with push-on type RF interface is designed to reduce time and cost for the integrator without impacting reliability or performance. And like heritage single-point threaded interfaces such as SMA and SMK, the Multiport Quick-Connect Harness supports the same critical operating frequencies, return loss, and RF shielding specifications.

We also offer:


- » Push-on male and female connector interfaces per MIL-STD-348
- » Modular and configurable housings based on the preferred push-on type interface
- » Controlled 1/4-turn quick connect with visual lock/unlock indicator
- » Field-replaceable cable assemblies with extraction tool
- » Full range of UTIFLEX®/UTIPHASE™ cable diameters, allowing for varying insertion loss performance
- » Heat-shrink reinforcement with integration indicators and build-to-print labeling
- » Design flexibility to support 2x – 12x transmission paths

FEATURES	BENEFITS
40 GHz operation	• A single configuration to address all satellite communication bands
19 dB return loss and -80 dB RF shielding	• Offers the same high-performing RF output as single-point SMA and SMK interconnects
Spring-loaded, locking, 1/4-turn fastener with visual lock/unlock indicator	• Removes the need for controlling wrench torque and securing coupling nuts with epoxy
Flight, TVAC, and T&M availability	• No change in performance, whether it be a fully-rated space flight model or test and measurement harness


Multiport Quick-Connect Harness With Push-On Type RF Interface

PERFORMANCE

S11 Return Loss
MCJ142, 60-inch Harness, Multiport SMP Male to SMK Male

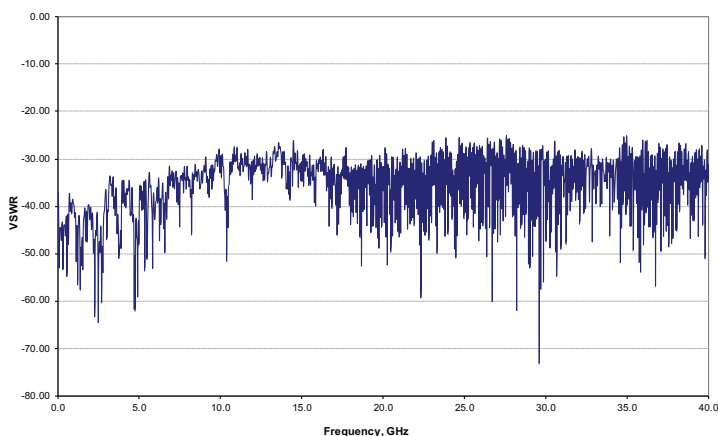

S11 VSWR
Complete Path: Mated Multiport SMP-m/f to SMK Male

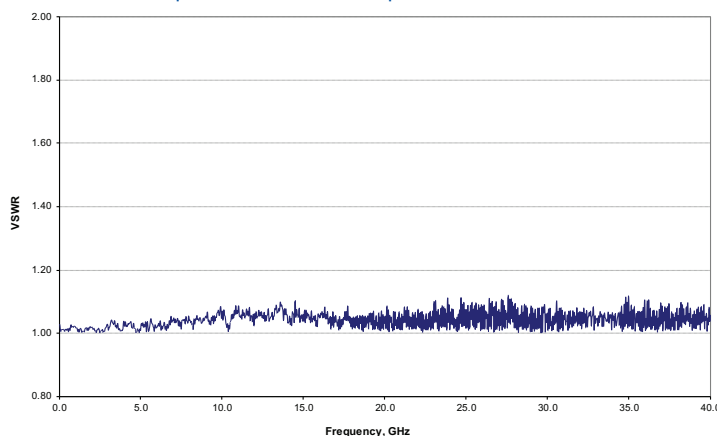

8-Way Multiport SMP Harness Shielding Effectiveness
(Mode Stir Test Method)

