

4








3

2

1



REVISIONS			
REV.	DESCRIPTION	DATE	APPROVED
0	INITIAL RELEASE	5/6/19	PV
1	UPD PCB (COMMON SL AND CPW)	5/13/2019	PV
2	CHANGED PN, WAS: TMB-V8F2-1L1C	1/9/2020	PV
3	CHANGED DIM	1/21/2020	PV
4	UPDATED TO 59-2X025-44050C	2/3/2020	PV
5	UPDATED TO 59-2X025-44050D	8/12/2020	FY
6	ADD MOUNTING SCREWS INFO TO TABLE	9/15/2021	JZ

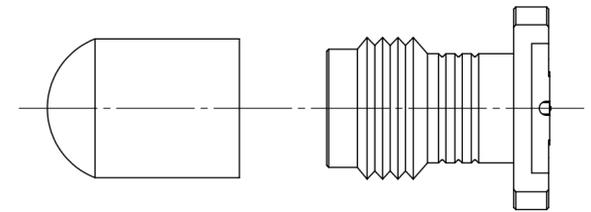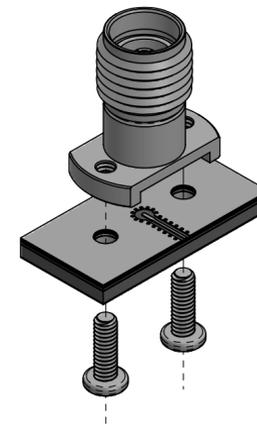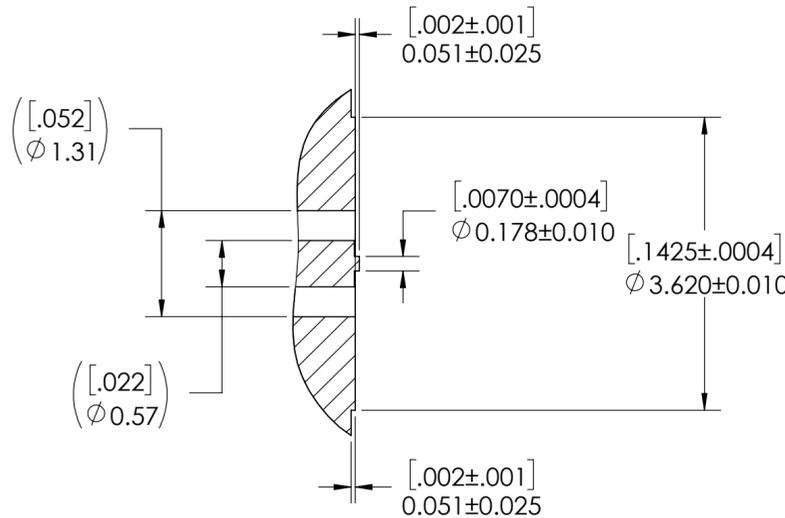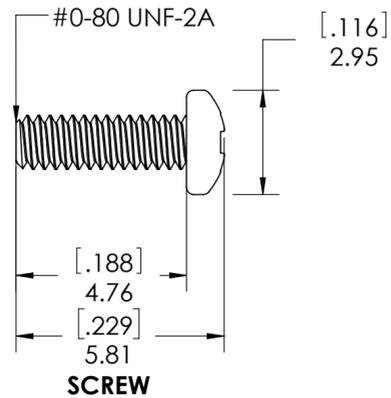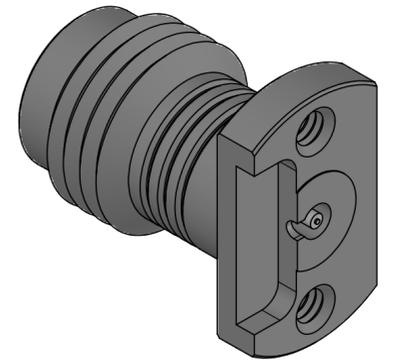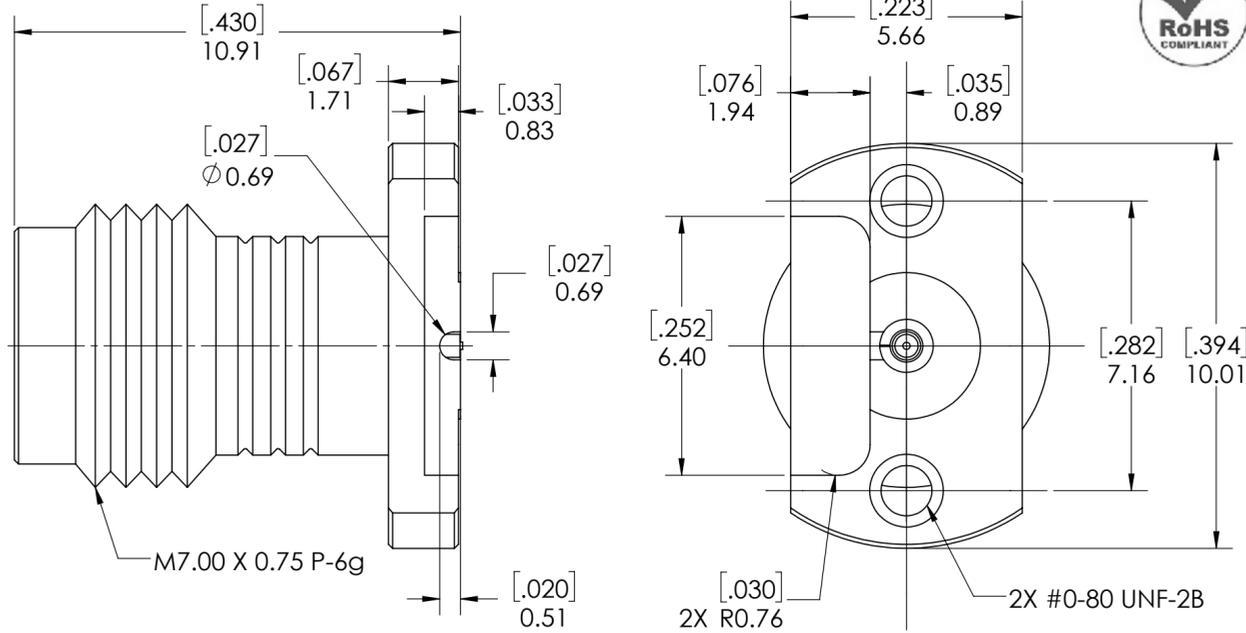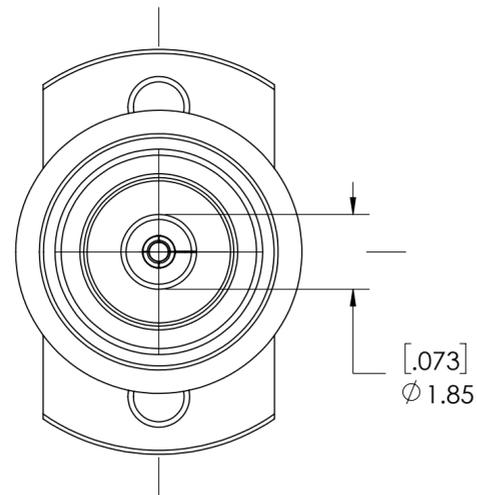

PROTECTION CAP

- NOTE(S):
- These characteristics are typical and for reference
  - DYH: 59-20025-44050D
  - See sheet 2 for PCB interface definition.

MATERIAL(S) :	ELECTRICAL(S) :	MECHANICAL(S) :	ENVIRONMENTAL(S) :
Body: Stainless Steel Center Conductor: Beryllium Copper Insulator: PCTFE, white RoHS Compliant Protective Cap: Soft PVC Color: Green Mounting Screws: Stainless Steel	Impedance: 50 Ohms Nominal Frequency Range: DC to 67 GHz VSWR: 1.30 max at 67 GHz Working Voltage: 500 V RMS max @ Sea Level Dielectric Withstand Voltage: 1000 V RMS max. Insulation Resistance: 5000 megaohms min. Contact Resistance: Initial: Center Contact: 3 Milliohms max Outer Contact: 2.5 Milliohms max Insertion Loss: <0.49 db @ 67 GHz	Mating Characteristics: Interface per MIL-STD-348 Force to Engage & Disengage: Torque: 2 inch-pounds max Longitudinal Force: NA Connector Durability: 500 Cycles min. Permeability: Less than 2.0 mu. Center Contact Retention: Axial Force: 6 pounds min. Radial Force: NA	Temperature Range: -55 °C to +85 °C Moisture Resistance: MIL-STD-202, Method 103, Test Condition B Corrosion: MIL-STD-202, Method 101, Test Condition B Vibration: MIL-STD-202, Method 204, Test Condition A Shock: MIL-STD-202, Method 213, Test Condition 1

FINISH(ES) :	APPLICABLE CARLISLE IT DOCUMENTS			TOLERANCES AND NOTES EXCEPT AS NOTED	APPROVAL	INITIALS	DATE
	WORK STANDARD	PROD INSTRUC	ASSY INSTRUC				
Body: Passivated Center Conductor: Gold Plating Mounting Screws: Passivated	NA	NA	NA	THIRD ANGLE PROJECTION SCALE 8:1 DIMENSIONS ARE IN [INCHES] MM ANGLES ±2° .XX DECIMALS ±.063 .XXX DECIMALS ±.01	DRAWN BY: PV CHECKED BY: PV DESIGN ENG: APPR BY:	PV PV   	4/30/2019 4/30/2019
<div style="display: flex; justify-content: space-between;"> <div style="font-size: small;"> <p><b>NOTICE</b></p> <p>THIS DRAWING EMBODIES A CONFIDENTIAL PROPRIETARY DESIGN ORIGINATED BY CARLISLE INTERCONNECT TECHNOLOGIES &amp; ALL DESIGN, MANUFACTURING, REPRODUCTION, USE &amp; SALE RIGHTS REGARDING THE SAME ARE EXPRESSLY RESERVED. IT IS SUBMITTED UNDER A CONFIDENTIAL RELATIONSHIP FOR A SPECIFIED PURPOSE &amp; THE RECIPIENT AGREES BY ACCEPTING THIS DRAWING NOT SUPPLY OR DISCLOSE ANY INFORMATION REGARDING IT TO ANY UNAUTHORIZED PERSON TO INCORPORATE IN OTHER PROJECTS ANY SPECIAL FEATURES PECULIAR TO THIS DESIGN. ALL PATENT RIGHTS HERETO ARE EXPRESSLY RESERVED BY CARLISLE INTERCONNECT TECHNOLOGIES, CERRITOS, CALIFORNIA 90703</p> </div> <div style="text-align: center;">             Dongguan City, Guangdong P.R. China 523533         </div> <div style="text-align: right;"> <p><b>TITLE</b> 1.85mm FEMALE 2 HOLE FLANGE POST CONTACT, CPW</p> <p>SCALE 8:1 SUB-DIRECTORY/OUTLINE/ DRAWING NO. SHEET 1 OF 2 REV. 6</p> <p><b>TMB-V8F2-3LC</b></p> </div> </div>							

4

3

2





1

4

3

2

1

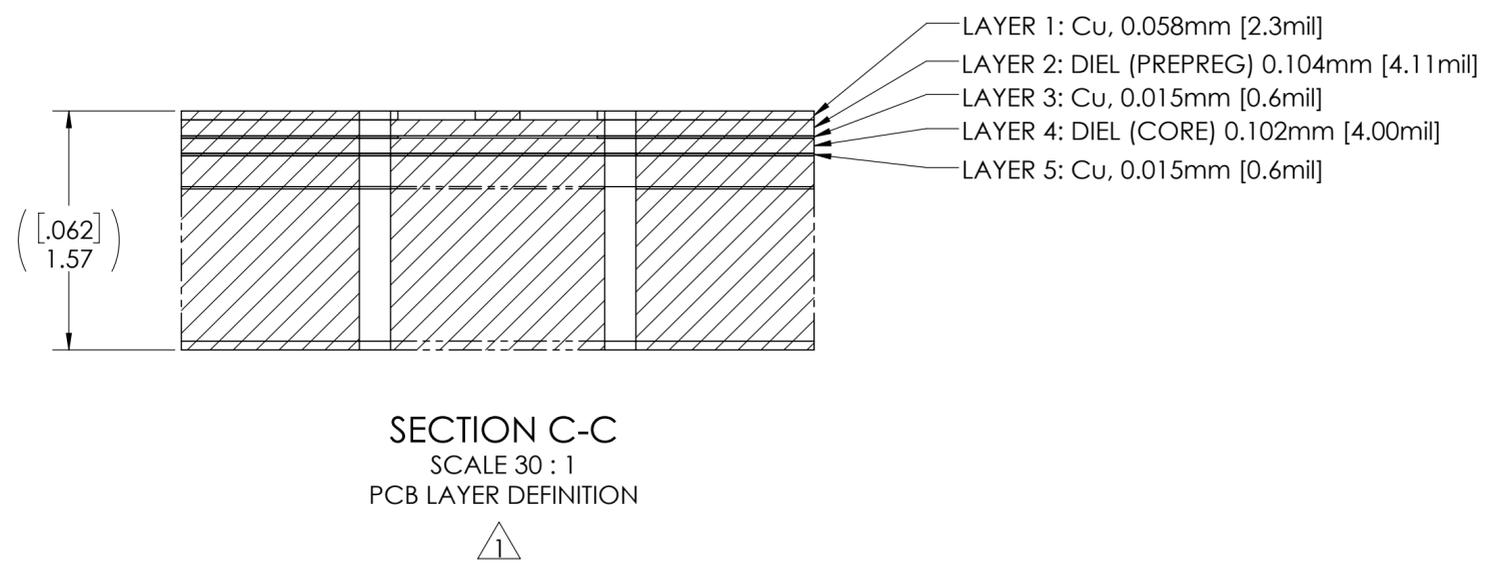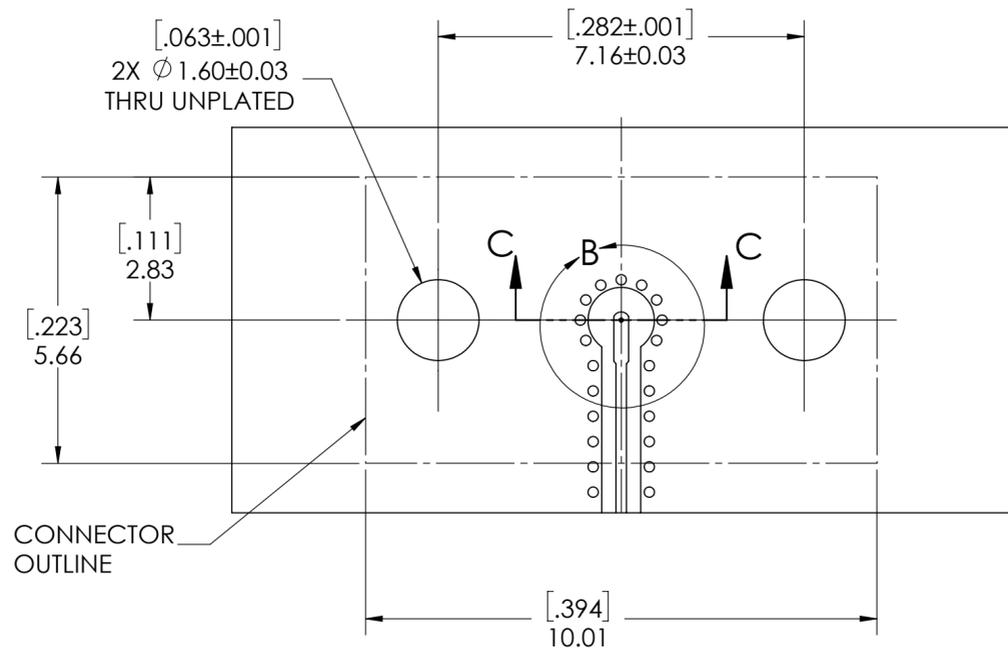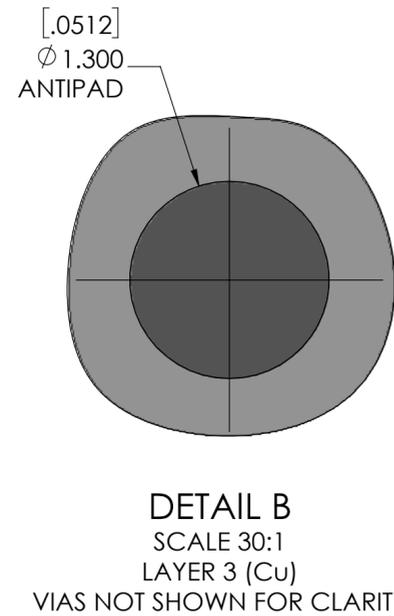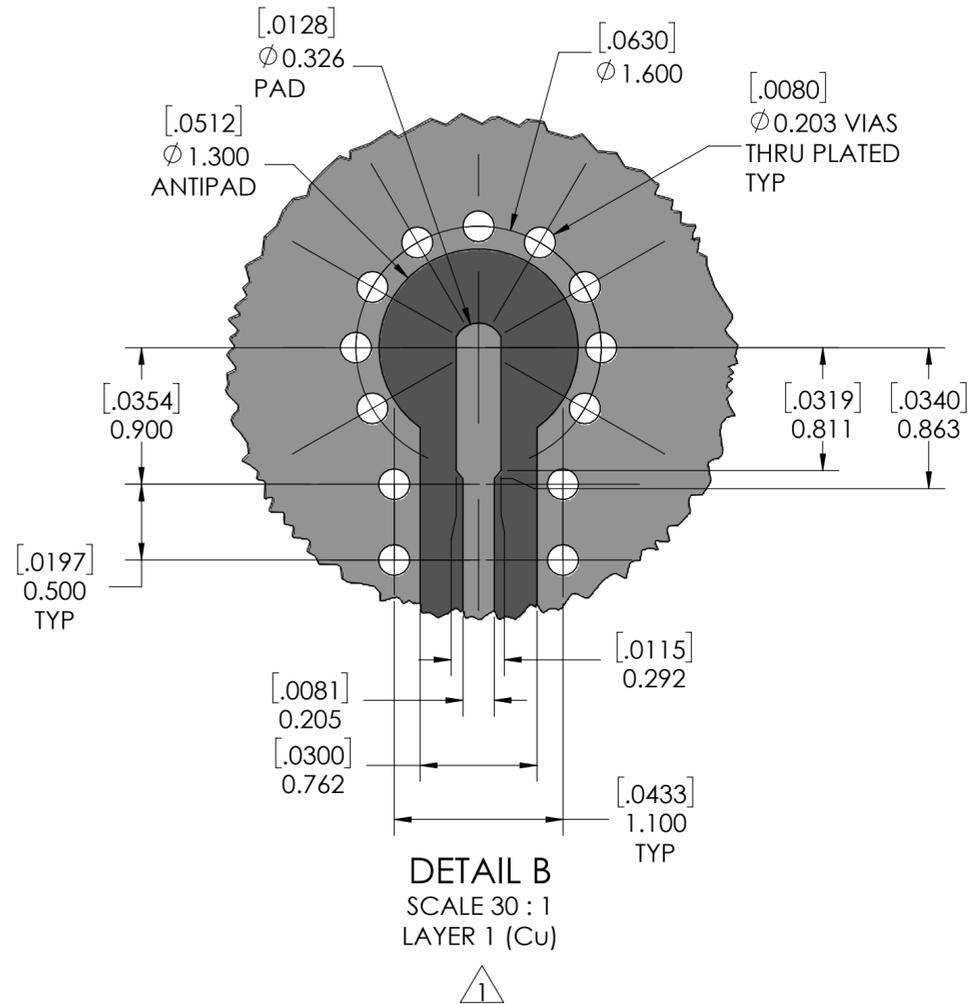

SCALE	SUB-DIRECTORY/	SHEET 2 OF 2
10:1		
SIZE	CAGE CODE	DRAWING NO.
C		<b>TMB-V8F2-3LC</b>
		REV. 6

4

3

2

1