


Low-Loss Semi-Rigid Coaxial Cables

P/N UT-047C-TP-LL | 50 Ω Tin-Plated Copper Outer Conductor

INTRODUCTION

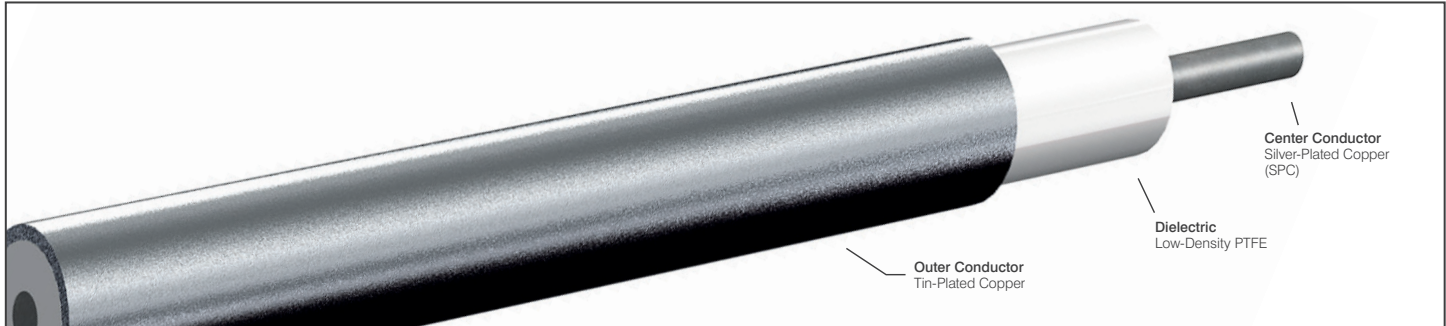

Low-loss semi-rigid cables provide lower attenuation, better phase stability with temperature, and a higher operating temperature compared to traditional solid PTFE semi-rigid cables.

Our low-loss semi-rigid cables are available with a copper, tin-plated copper, aluminum, or tin-plated aluminum outer conductor.

| DIMENSIONS | | |
|---------------------------|-------|----------------------|
| Outer Conductor Diameter | in | 0.047 + 0.002/-0.001 |
| | mm | 1.194 + 0.051/-0.025 |
| Center Conductor Diameter | in | 0.0126 |
| | mm | 0.3200 |
| Length (Maximum) | Feet | 20 |
| | Meter | 6.10 |

| MATERIALS | |
|-------------------------|---------|
| Outer Conductor | Copper |
| Outer Conductor Plating | Tin |
| Dielectric | LD PTFE |
| Center Conductor | SPC |
| RoHS Compliant | ✓ |

| MECHANICAL CHARACTERISTICS* | | |
|---------------------------------|-------------|-------|
| Outer Conductor Integrity Temp. | °C | 225 |
| Operating Temperature (Max) | °C | 225 |
| Inside Bend Radius (Minimum) | in | 0.125 |
| | mm | 3.175 |
| Weight | lbs / 100ft | 0.39 |
| | kg / 100m | 0.59 |

* Applicable at room temperature. Contact factory for performance over temperature range.

| ELECTRICAL CHARACTERISTICS* | | |
|-----------------------------------|--------------|-------|
| Characteristic Impedance | ohm | 50 |
| Capacitance | pF / ft | 26.5 |
| | pF / m | 86.8 |
| Corona Extinction Voltage | VRMS @ 60 Hz | 900 |
| Voltage Withstanding | VRMS @ 60 Hz | 2700 |
| Higher Order Mode Frequency | GHz | 116.0 |
| Attenuation (Db / 100 Ft Typical) | @ 0.5 GHz | 21.9 |
| | @ 1.0 GHz | 31.1 |
| | @ 5.0 GHz | 70.2 |
| | @ 10.0 GHz | 100 |
| | @ 18.0 GHz | 135.2 |
| | @ 26.5 GHz | 165.2 |
| | @ 40.0 GHz | 204.8 |
| | @ 50.0 GHz | 230.2 |
| | @ 65.0 GHz | 264.4 |
| Power (Watts Cw @ 20 °C, Maximum) | @ 0.5 GHz | 100.2 |
| | @ 1.0 GHz | 70.8 |
| | @ 5.0 GHz | 31.4 |
| | @ 10.0 GHz | 22.1 |
| | @ 18.0 GHz | 16.4 |
| | @ 26.5 GHz | 13.4 |
| | @ 40.0 GHz | 10.9 |
| | @ 50.0 GHz | 9.7 |
| | @ 65.0 GHz | 8.4 |
| @ 90.0 GHz | 7.1 | |